



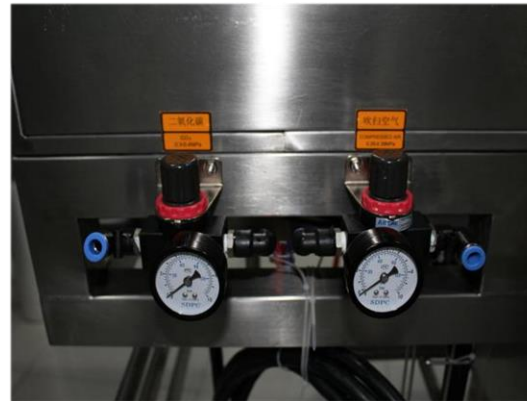

Standard Kegs  
& Equipment LLC

# SK Dual Head Manual Keg Washer

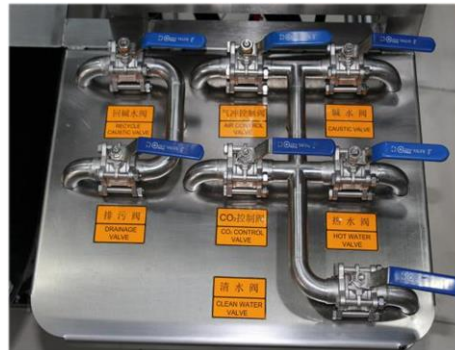

20-40 kegs/h	Manual		<ul style="list-style-type: none"><li>- UL Listed Components -</li><li>- Micro-Matic Brand Couplers -</li><li>- 2 x 100L Tanks -</li><li>- Caustic Heating Element -</li></ul>
--------------	--------	--	--



**Standard Kegs  
& Equipment LLC**

# SK Dual Head Manual Keg Washer

	Specifications	Details	Notes
<b>Model</b>	<b>SK Dual Manual</b>		
1	Dimensions	165 x 145 x 143cm Height	
2	Weight	150KGS	
3	Power input	According to client requirement	
4	Power consumption	15.5KW	
5	Power port	3P+N+G	
6	Material	SUS304	
7	Coupler	MICRO-MATIC	
8	Hose material	Toyox Food standard hose	
9	Low-voltage apparatus	Omron	
10	Heating method and consumption	Electrical heating / 6KW/pc (in Caustic tank and hot water tank)	
11	Liquid Tank Volume	2 x 100L	
12	Motor + Pump	SUS304 high temp pump head	
13	Temperature sensor	PT100	
14	Thermo control	EVCO Italy EVK401V7	
15	Control	Manual valve control	
16	Connection types	1.5" Tri-clamp	



**Standard Kegs  
& Equipment LLC**

# SK Dual Head Manual Keg Washer

17	Spear type	D Type	
18	Keg sizes	AMERICAN - EURO DIN -5L-60L	
19	Freight packaging	Wooden composite crate	

Basic Hardware	Two pumps, two tanks w/o insulation, hot water/cold water connect from external source
Working Procedure	<b>CLEANING PROCEDURE:</b> CONTACT → PURGE → RINSE/DRAIN → PURGE → CAUSTIC → PURGE → HOT WATER RINSE 1 → PURGE → HOT WATER RINSE 2 → CO2 PURGE → CO2 BACK PRESSURE → CYLINDER RETURN
EXW	