




SK301-2 Dual Head Keg Washer & Filler + CIP



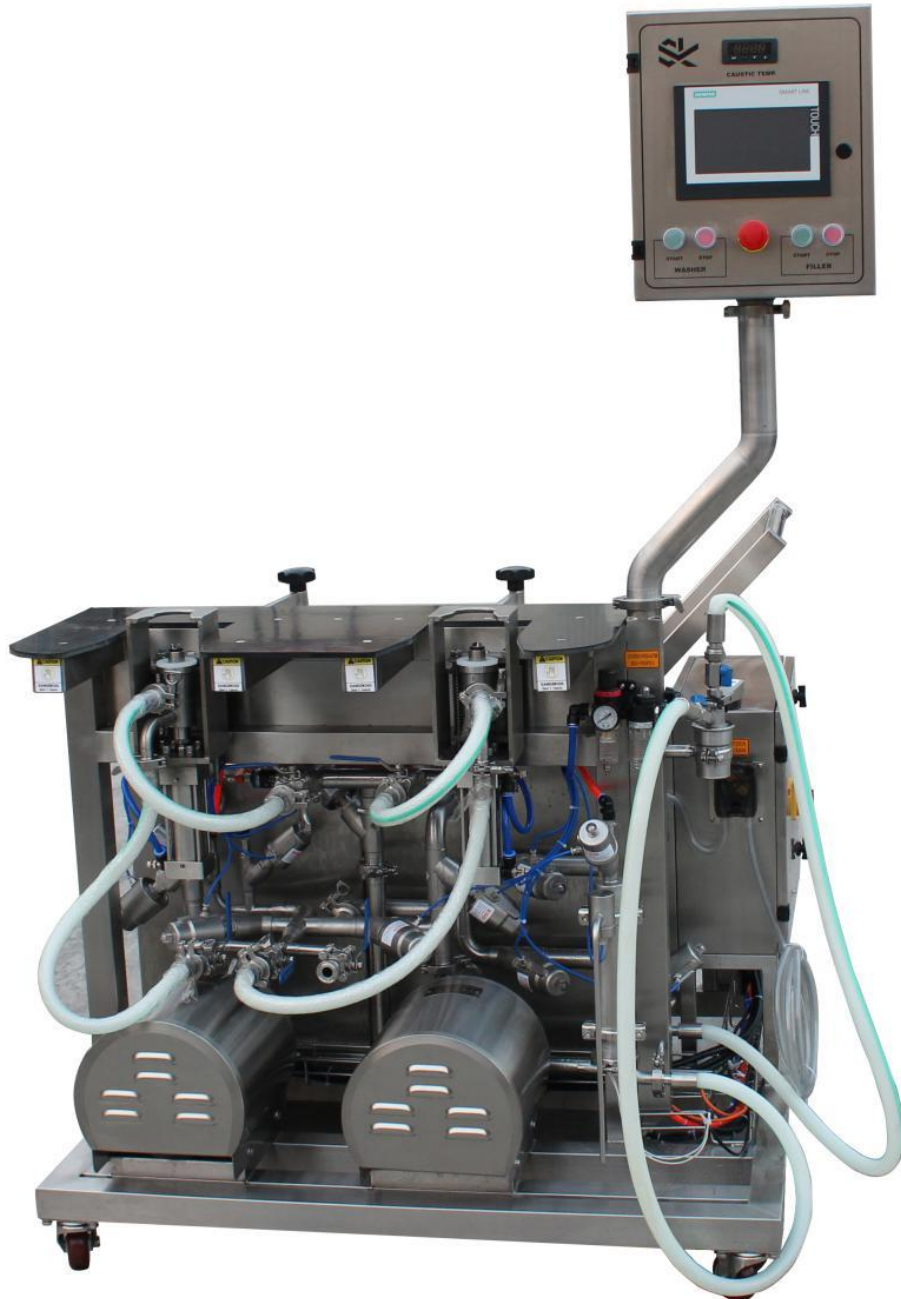

SK301-2 Dual Head Keg Washer & Filler + CIP

	Specifications	Details	Notes
Model	SK301		
1	Dimensions	39.5in X 43.5in X 16in	1. Sight Glass on inlet
2	Weight	310LB	
3	Power input	According to client requirement	2. Manual valve on inlet
4	Power consumption	8KW	
5	Power port	3P+N+G	3. Dosing pump
6	Material	SUS304	
7	Coupler	MICRO-MATIC	4. CIP Cart function
8	Hose material	Toyox Food Grade Hose	
9	Low-voltage apparatus	Omron	5. Wheels included
10	Heating method and consumption	Electric heating / 6KW/pc (in caustic tank)	
11	Liquid Tank Volume	2 x 100L	
12	Motor + Pump	SUS304 high temp pump head	
13	Temperature sensor	PT100	
14	Thermo control	EVCO Italy EVK401V7	
15	Control	Siemens PLC200 Smart +Smart IEV7	
16	Connection types	1.5" Tri-clamp	
17	Spear type	D Type	
18	Keg sizes	AMERICAN - EURO DIN -5L-60L	
19	CIP function	Yes	
20	Filling control	Flow Switch Yes	
21	Freight packaging	Wooden composite crate	

Basic Hardware	Two pumps, two tanks w/o insulation, hot water/cold water connect from external source
Working Procedure	<p>CLEANING PROCEDURE: CONTACT → PURGE → RINSE/DRAIN → PURGE → CAUSTIC → PURGE → HOT WATER RINSE 1 → PURGE → HOT WATER RINSE 2 → PURGE → SANITIZER RINSE/DRAIN OFF → CO2 PURGE → CO2 BACK PRESSURE → CYLINDER RETURN</p> <p>FILLER WORKING PROCEDURE: FASTEN COUPLER → CO2 BACK PRESSURE → FILLING → STOP → TAKE OFF COUPLER</p>
EXW	\$



SK301-2 Dual Head Keg Washer & Filler + CIP

